


Devlon®

V-API

Devlon® V-API is designed specifically for valve and offshore applications

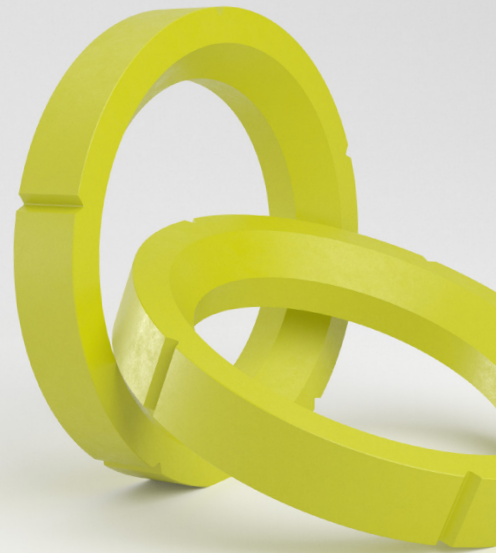

Devlon® V-API is a proprietary formula developed by James Walker and designed specifically for use in the valve industry.

Prime features

- Exceptional resistance to wear and abrasion
- Excellent life performance in soft valve seat applications
- Low moisture absorption
- Wide temperature and pressure operating range

Application guidelines

Offers a cost-effective solution with superior performance, operating across a wide temperature and pressure range. Devlon V-API is well suited to offshore applications where weight-saving, non-corrosive and impact wear properties are imperative.

For added peace of mind, full traceability is offered through the inclusion of Positive Material Identification (PMI). The material properties are in no way altered or compromised by PMI technology, though its inclusion guarantees that genuine Devlon can be quickly and easily identified.



TEMPERATURE

Maximum Operating Temperature:

+176°C (+349°F)

Minimum Operating Temperature:

-50°C (-58°F)



COLOUR

Yellow

Devlon® V-API is designed specifically for valve and offshore applications

Typical physical properties

Property	Test method	Units	Value
Tensile strength at yield 23°C	ASTM D638	MPa	79.92
	-	Psi	11,592
Tensile strength at break -40°C	ASTM D638	MPa	109.52
	-	Psi	15,885
Elongation at yield 23°C	ASTM D638	%	5.37
Elongation at break	ASTM D638	%	-
Hardness	-	Shore D	82/85
	ASTM D785	Rockwell	112
Flexural strength	ASTM D790	MPa	121.55
	-	Psi	17,630
Deformation under load 140 Kg/cm ² at 23°C for 24 hours	ASTM D621	%	1.0/2.0
Charpy impact strength at 23°C	ASTM D256	J/M	54.8
	-	ftlbs/inch	12.3
Charpy impact strength at -40°C	ASTM D256	J/M	19.8
	-	ftlbs/inch	4.5
Modulus of elasticity	ASTM D638	MPa	4,138
	-	Psi	600,175
Compressive strength	ASTM D695	MPa	140
	-	Psi	20,305
Compressive yield strength	ASTM D695	MPa	91.2
	-	Psi	13,227
Linear thermal expansion coefficient 30 - 100°C	ASTM E831	mm/mm/°C	1.11 x 10 ⁻⁴
Melt point	ASTM D3418	°C	216
Heat distortion temperature °C	ASTM D648	66 Psi	209
Specific gravity	ASTM D792	g/cm ³	1.14
Water absorption 24 hrs	ASTM D570	%	0.105
Water absorption saturation	ASTM D570	%	3

James Walker Worldwide

Australia

T: +61 2 9721 9500
E: sales.au@jameswalker.biz

Belgium

T: +32 3 820 79 00
E: sales.be@jameswalker.biz

Brazil

T: +55 11 4392 7360
E: sales.br@jameswalker.biz

China

T: +86 21 6876 9351
E: sales.cn@jameswalker.biz

France

T: +33 437 49 74 80
E: sales.fr@jameswalker.biz

Germany

T: +49 4038 60810
E: sales.de@jameswalker.biz

India

T: +91 224 0808080
E: sales.in@jameswalker.biz

Ireland

T: +353 214 323626
E: sales.ie@jameswalker.biz

Italy

T: +39 2 2578308
E: sales.it@jameswalker.biz

Middle East

T: +971 481 78888
E: sales.jwme@jameswalker.biz

Netherlands

T: +31 186 633111
E: sales.nl@jameswalker.biz

New Zealand

T: +64 9 272 1599
E: sales.nz@jameswalker.biz

Norway

T: +47 22 75 75 00
E: sales.no@jameswalker.biz

Singapore

T: +65 6715 6300
E: sales.sg@jameswalker.biz

South Africa

T: +27 31 304 0770
E: sales.za@jameswalker.biz

Spain & Portugal

T: +34 94 447 00 99
E: sales.es@jameswalker.biz

UK

T: +44 1270 536000
E: sales.uk@jameswalker.biz

USA

T: +1 708 754 4020
E: sales.jwna.us@jameswalker.biz

Information given in this publication is given in good faith and represents the results of specific individual tests carried out by James Walker or third parties in accordance with the methodologies described in this publication, performed in a laboratory. No representation or warranty is given in relation to such information. Values and/or operating limits given in this publication are not an indication that these values and/or operating limits can be applied simultaneously. While such results may comprise useful additional information and are industry standard tests, they are no substitute for conducting (or procuring from James Walker) your own tests and engineering analysis and satisfying yourself as to the suitability of the product you select. Please also note that a product tested in accordance with the published methodology may not perform to such values in application and/or under different test conditions or methodologies for a variety of reasons, including but not limited to the environment in which it is used/tested or which passes through it or otherwise affects the product, or due to the handling, storage or installation, or due to the effect of housing or other parts. Our personnel will be happy to discuss any historical examples we have of a product having been previously used in a particular application.

To ensure you are working with the very latest product specifications, please consult the relevant section of the James Walker website: www.jameswalker.biz.

James Walker Sealing Products & Services Ltd

Registered Office: Lion House, Oriental Road,
Woking, Surrey GU22 8AP, United Kingdom.

Reg no: 00264191 England