


James Walker® KlickFix®

Product success: Vasa horizontal pump in a MDF production plant

Modified six lip KlickFix® cartridge and shaft sleeve complete with hard surface coating applied in the operating area for the KlickFix.

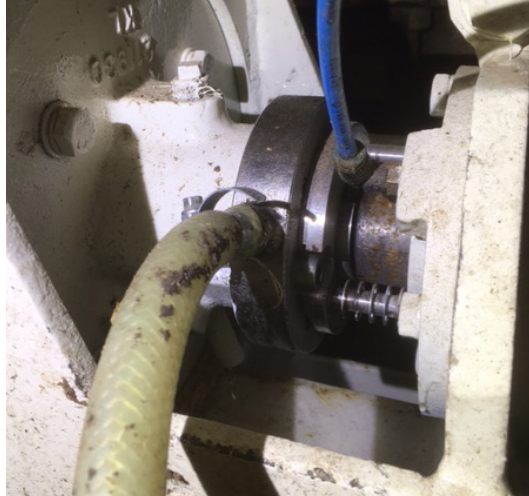

- Shaft: Ø 48 mm (1.88")
- Speed: 2.5 m/s (492 fpm)
- Stuffing box pressure: 2 bar (200 kPa)
- Pressurised clean water pressure: 2.5 bar (250 kPa)
- Media: Waste water containing very abrasive wood powder
- Replaced: Mechanical type seal
- Benefits: Long service life, no visible leakage and no adjustment.